


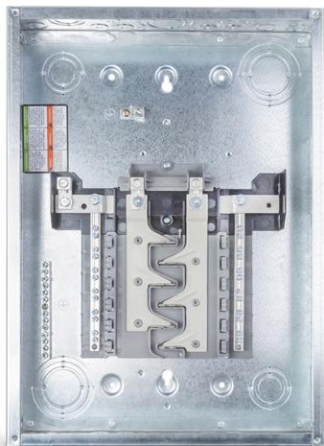

Representative

Catalog Number: SLC32L125PTC
UPC Number: 88861462929
Status: Active

Sentricity, 32 Circuits, 125 Amps, Main Lug Only Indoor Load Center, NEMA 1, Main Lug - 10 kAIC SCCR (Short Circuit Current Rating), 120/240 VAC - Single Phase 3 Wire - UL 67 Listed, Fixed Main Lug. Equipment Ground Bar Kit Installed. Incoming Cables Aluminum #14 - 2/0, Copper #14 - 2/0, Indoor Enclosure Dimensions Width 14.25 inch (362 mm), Height 35.50 inch (902 mm), Depth 3.94 inch (101 mm).

North American Specifications (UNSPSC)

UNSPSC	39121101 Load centers
IGCC	4310 Single Phase Main Lug Load Centers
Brand Name	ABB
Type	Single Phase Main Lug Load Centers
Special Features	Keyhole Mounting Slots. Unique Diamond Knock-out Design. Backed Out Captive Terminal Screws on Ground and Neutral Bars. Cover Hanging Tabs. Galvanized Enclosure. Main Lug Interior.
Application	Load Centers offer Faster and Easier Installations. They deliver the best Features Available on the Market into one Standard Offering.
Standard	UL Listed
Voltage Rating	120/240 VAC
Amperage Rating	125
Phase	1
Interrupt Rating	22/10 kAIC Series Rating
Number Of Spaces	32
Cable Size	Incoming Cables Aluminum #14 - 2/0, Copper #14 - 2/0
Size	Indoor Enclosure Dimensions Width 14.25 inch (362mm), Height 35.50 inch (902mm), Depth 3.94 inch (100mm).
Mounting	Keyhole Mounting Slots
Enclosure	yes

Packaging

Outer Quantity	1
Outer Dimensions (inches)	32x15.5x5.25
Weight Uom	30 lbs. Each

Documents / Support Tools

3D Rendering	Available on Website
Catalog US	Available on Website
Catalog Canada	Available on Website

For further technical assistance, please contact us...

Thomas & Betts - USA
 860 Ridge Lake Blvd.
 Memphis, TN 38120
www.tnb.com

T&B Technical Support
 MS 3B-50
 860 Ridge Lake Blvd.
 Memphis, TN 38120

Hours: 7AM - 6PM CDT
 Monday-Friday
 Phone: (888) 862-3289
 Fax: (901) 252-1321
 Email: techsupport@tnb.com