




Product designation	Neutral terminal		
Product type designation	GAX3		
Number of poles	Nr.	1	
Operating voltage type		AC	
Contact characteristics			
IEC Conventional free air thermal current I _{th}	A	63	
Rated insulation voltage U _i IEC/EN	V	1000	
Mechanical features			
Terminals			
	type		Pillar
	width	mm	5.6
	height	mm	6.5
	screw		M4
	tool		Phillips 2
Conductor section			
	IEC min	mm ²	0.75
	IEC max	mm ²	16
	AWG/kcmil min		18
	AWG/kcmil max		6
Weight		g	40
UL technical data			
UL Standard		UL60947-4-1	
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	+55
Storage temperature			
	min	°C	-40
	max	°C	+70
Max altitude		m	3000
Resistance & Protection			
Frontal IP degree		IP20	
Pollution degree		3	
Dimensions			

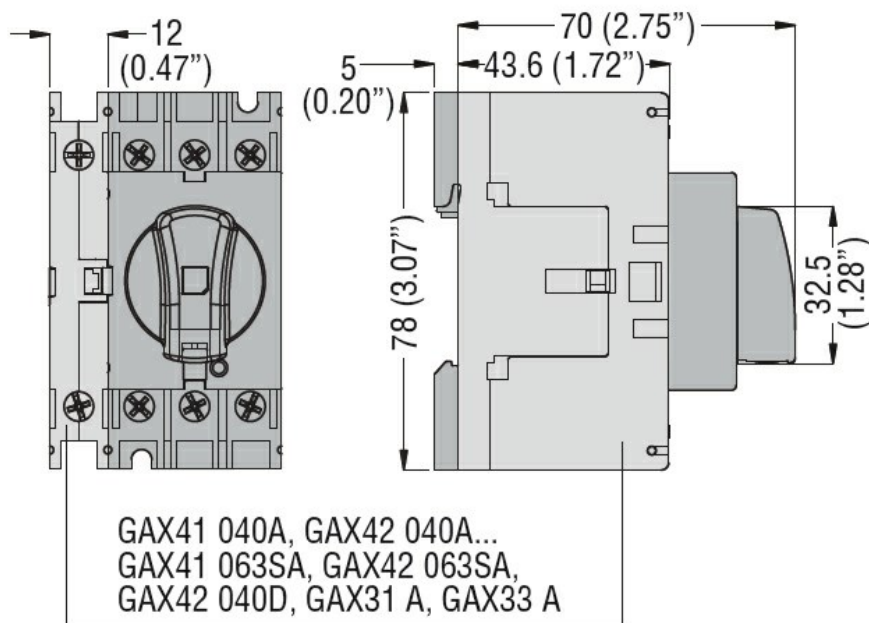

Wiring diagrams

Neutral terminal GAX31... - GAX32...



Certifications and compliance

Compliance

CSA C22.2

IEC/EN 60947-1

IEC/EN 60947-3

IEC/EN 60947-5-1

UL508

UL98

Certifications

CSA C22.2 n°14

cULus according to UL508

EAC

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology