



Product designation

Power contactor

Product type designation

BG06

**Contact characteristics**

|                                                                                |                                                    |       |
|--------------------------------------------------------------------------------|----------------------------------------------------|-------|
| Number of poles                                                                | Nr.                                                | 3     |
| Rated insulation voltage $U_i$ IEC/EN                                          | V                                                  | 690   |
| Rated impulse withstand voltage $U_{imp}$                                      | kV                                                 | 6     |
| Operational frequency                                                          | min Hz                                             | 25    |
|                                                                                | max Hz                                             | 400   |
| IEC Conventional free air thermal current $I_{th}$                             | A                                                  | 16    |
| Operational current $I_e$                                                      | AC-1 ( $\leq 40^\circ\text{C}$ )                   | A 16  |
|                                                                                | AC-1 ( $\leq 55^\circ\text{C}$ )                   | A 14  |
|                                                                                | AC-1 ( $\leq 70^\circ\text{C}$ )                   | A 12  |
|                                                                                | AC-3 ( $\leq 440\text{V } \leq 55^\circ\text{C}$ ) | A 6   |
|                                                                                | AC-4 (400V)                                        | A 3.3 |
| Rated operational power AC-3 ( $T \leq 55^\circ\text{C}$ )                     | 230V kW                                            | 1.5   |
|                                                                                | 400V kW                                            | 2.2   |
|                                                                                | 415V kW                                            | 2.4   |
|                                                                                | 440V kW                                            | 2.5   |
|                                                                                | 500V kW                                            | 3     |
|                                                                                | 690V kW                                            | 3     |
| Rated operational power AC-1 ( $T \leq 40^\circ\text{C}$ )                     | 230V kW                                            | 6     |
|                                                                                | 400V kW                                            | 10    |
|                                                                                | 500V kW                                            | 13    |
|                                                                                | 690V kW                                            | 18    |
| IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series | $\leq 24\text{V}$ A                                | 9     |
|                                                                                | 48V A                                              | 8     |
|                                                                                | 75V A                                              | 4     |
|                                                                                | 110V A                                             | 3     |
|                                                                                | 220V A                                             | —     |
| IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series | $\leq 24\text{V}$ A                                | 12    |
|                                                                                | 48V A                                              | 11    |
|                                                                                | 75V A                                              | 7     |
|                                                                                | 110V A                                             | 6     |
|                                                                                | 220V A                                             | —     |
| IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series | $\leq 24\text{V}$ A                                | 14    |
|                                                                                | 48V A                                              | 14    |
|                                                                                | 75V A                                              | 8     |
|                                                                                | 110V A                                             | 8     |

|                                                                                  |                 |                  |      |
|----------------------------------------------------------------------------------|-----------------|------------------|------|
|                                                                                  | 220V            | A                | 1    |
| IEC max current I <sub>e</sub> in DC1 with L/R ≤ 1ms with 4 poles in series      |                 |                  |      |
|                                                                                  | ≤24V            | A                | —    |
|                                                                                  | 48V             | A                | —    |
|                                                                                  | 75V             | A                | —    |
|                                                                                  | 110V            | A                | —    |
|                                                                                  | 220V            | A                | —    |
| IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 1 poles in series |                 |                  |      |
|                                                                                  | ≤24V            | A                | 6    |
|                                                                                  | 48V             | A                | 5    |
|                                                                                  | 75V             | A                | 2    |
|                                                                                  | 110V            | A                | 1    |
|                                                                                  | 220V            | A                | —    |
| IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 2 poles in series |                 |                  |      |
|                                                                                  | ≤24V            | A                | 7    |
|                                                                                  | 48V             | A                | 7    |
|                                                                                  | 75V             | A                | 4    |
|                                                                                  | 110V            | A                | 3    |
|                                                                                  | 220V            | A                | —    |
| IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 3 poles in series |                 |                  |      |
|                                                                                  | ≤24V            | A                | 9    |
|                                                                                  | 48V             | A                | 9    |
|                                                                                  | 75V             | A                | 5    |
|                                                                                  | 110V            | A                | 4    |
|                                                                                  | 220V            | A                | 0,5  |
| IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 4 poles in series |                 |                  |      |
|                                                                                  | ≤24V            | A                | —    |
|                                                                                  | 48V             | A                | —    |
|                                                                                  | 75V             | A                | —    |
|                                                                                  | 110V            | A                | —    |
|                                                                                  | 220V            | A                | —    |
| Short-time allowable current for 10s (IEC/EN60947-1)                             |                 | A                | 96   |
| Protection fuse                                                                  |                 |                  |      |
|                                                                                  | gG (IEC)        | A                | 16   |
|                                                                                  | aM (IEC)        | A                | 6    |
| Making capacity (RMS value)                                                      |                 | A                | 92   |
| Breaking capacity at voltage                                                     |                 |                  |      |
|                                                                                  | 440V            | A                | 72   |
|                                                                                  | 500V            | A                | 72   |
|                                                                                  | 690V            | A                | 72   |
| Resistance per pole (average value)                                              |                 | mΩ               | 10   |
| Power dissipation per pole (average value)                                       |                 |                  |      |
|                                                                                  | I <sub>th</sub> | W                | 2.6  |
|                                                                                  | AC-3            | W                | 0.36 |
| Tightening torque for terminals                                                  |                 |                  |      |
|                                                                                  | min             | Nm               | 0.8  |
|                                                                                  | max             | Nm               | 1    |
|                                                                                  | min             | I <sub>bin</sub> | 9    |
|                                                                                  | max             | I <sub>bin</sub> | 9    |
| Tightening torque for coil terminal                                              |                 |                  |      |
|                                                                                  | min             | Nm               | 0.8  |
|                                                                                  | max             | Nm               | 1    |
|                                                                                  | min             | I <sub>bin</sub> | 9    |

|                                                     |                  |                  |                          |
|-----------------------------------------------------|------------------|------------------|--------------------------|
|                                                     | max              | I <sub>bin</sub> | 9                        |
| Max number of wires simultaneously connectable      |                  | Nr.              | 2                        |
| Conductor section                                   |                  |                  |                          |
| AWG/Kcmil                                           | max              |                  | 12                       |
| Flexible w/o lug conductor section                  | min              | mm <sup>2</sup>  | 0.75                     |
|                                                     | max              | mm <sup>2</sup>  | 2.5                      |
| Flexible c/w lug conductor section                  | min              | mm <sup>2</sup>  | 1.5                      |
|                                                     | max              | mm <sup>2</sup>  | 2.5                      |
| Flexible with insulated spade lug conductor section | min              | mm <sup>2</sup>  | 1.5                      |
|                                                     | max              | mm <sup>2</sup>  | 2.5                      |
| Power terminal protection according to IEC/EN 60529 |                  |                  | IP20 when properly wired |
| <b>Mechanical features</b>                          |                  |                  |                          |
| Operating position                                  | normal allowable |                  | Vertical plan ±30°       |
| Fixing                                              |                  |                  | Screw / DIN rail 35mm    |
| Weight                                              |                  | g                | 212                      |
| <b>Auxiliary contact characteristics</b>            |                  |                  |                          |
| Thermal current I <sub>th</sub>                     |                  | A                | 10                       |
| IEC/EN 60947-5-1 designation                        |                  |                  | A600 - Q600              |
| Operating current AC15                              | 230V             | A                | 3                        |
|                                                     | 400V             | A                | 1.9                      |
|                                                     | 500V             | A                | 1.4                      |
| Operating current DC12                              | 110V             | A                | 2.9                      |
| Operating current DC13                              | 24V              | A                | 2.9                      |
|                                                     | 48V              | A                | 1.4                      |
|                                                     | 60V              | A                | 1.2                      |
|                                                     | 110V             | A                | 0.6                      |
|                                                     | 125V             | A                | 0.55                     |
|                                                     | 220V             | A                | 0.3                      |
|                                                     | 600V             | A                | 0.1                      |
| <b>Operations</b>                                   |                  |                  |                          |
| Mechanical life                                     |                  | cycles           | 20000000                 |
| Electrical life                                     |                  | cycles           | 500000                   |
| <b>Safety related data</b>                          |                  |                  |                          |
| Performance level B10d according to EN/ISO 13489-1  | rated load       | cycles           | 500000                   |
|                                                     | mechanical load  | cycles           | 20000000                 |
| Mirror contacts according to IEC/EN 60947-4-1       |                  |                  | Yes                      |
| EMC compatibility                                   |                  |                  | yes                      |
| <b>DC coil operating</b>                            |                  |                  |                          |
| DC rated control voltage                            |                  | V                | 24                       |
| DC operating voltage                                |                  |                  |                          |
| pick-up                                             |                  |                  |                          |

|                                                  |  |          |     |      |
|--------------------------------------------------|--|----------|-----|------|
|                                                  |  | min      | %Us | 75   |
|                                                  |  | max      | %Us | 115  |
| drop-out                                         |  |          |     |      |
|                                                  |  | min      | %Us | 10   |
|                                                  |  | max      | %Us | 25   |
| Average coil consumption ≤20°C                   |  |          |     |      |
|                                                  |  | in-rush  | W   | 3.2  |
|                                                  |  | holding  | W   | 3.2  |
| Max cycles frequency                             |  |          |     |      |
| Mechanical operation                             |  | cycles/h |     | 3600 |
| Operating times                                  |  |          |     |      |
| Average time for Us control                      |  |          |     |      |
| in AC                                            |  |          |     |      |
| Closing NO                                       |  | min      | ms  | 12   |
|                                                  |  | max      | ms  | 21   |
| Opening NO                                       |  | min      | ms  | 9    |
|                                                  |  | max      | ms  | 18   |
| Closing NC                                       |  | min      | ms  | 17   |
|                                                  |  | max      | ms  | 26   |
| Opening NC                                       |  | min      | ms  | 7    |
|                                                  |  | max      | ms  | 17   |
| in DC                                            |  |          |     |      |
| Closing NO                                       |  | min      | ms  | 18   |
|                                                  |  | max      | ms  | 25   |
| Opening NO                                       |  | min      | ms  | 2    |
|                                                  |  | max      | ms  | 3    |
| Closing NC                                       |  | min      | ms  | 3    |
|                                                  |  | max      | ms  | 5    |
| Opening NC                                       |  | min      | ms  | 11   |
|                                                  |  | max      | ms  | 17   |
| UL technical data                                |  |          |     |      |
| Rated operational voltage AC (UL)                |  |          | V   | 600  |
| Full-load current (FLA) for three-phase AC motor |  |          |     |      |
|                                                  |  | at 480V  | A   | 4.8  |
|                                                  |  | at 600V  | A   | 3.9  |
| Yielded mechanical performance                   |  |          |     |      |
| for single-phase AC motor                        |  | 110/120V | HP  | 0.3  |
|                                                  |  | 230V     | HP  | 1    |
| for three-phase AC motor                         |  |          |     |      |
|                                                  |  | 200/208V | HP  | 1.5  |
|                                                  |  | 220/230V | HP  | 2    |
|                                                  |  | 460/480V | HP  | 3    |
|                                                  |  | 575/600V | HP  | 3    |
| General USE                                      |  |          |     |      |
| Contactor                                        |  |          |     |      |

|                                                      |  |                       |    |     |
|------------------------------------------------------|--|-----------------------|----|-----|
|                                                      |  | AC current            | A  | 16  |
| Short-circuit protection fuse, 600V                  |  |                       |    |     |
| High fault                                           |  | Short circuit current | kA | 100 |
|                                                      |  | Fuse rating           | A  | 30  |
|                                                      |  | Fuse class            | J  |     |
| Standard fault                                       |  | Short circuit current | kA | 5   |
|                                                      |  | Fuse rating           | A  | 30  |
| Contact rating of auxiliary contacts according to UL |  | A600 - Q600           |    |     |

### Ambient conditions

#### Temperature

##### Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -50 |
| max | °C | +70 |

##### Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -60 |
| max | °C | +80 |

#### Max altitude


m 3000

### Resistance & Protection


#### Pollution degree

3

### Dimensions

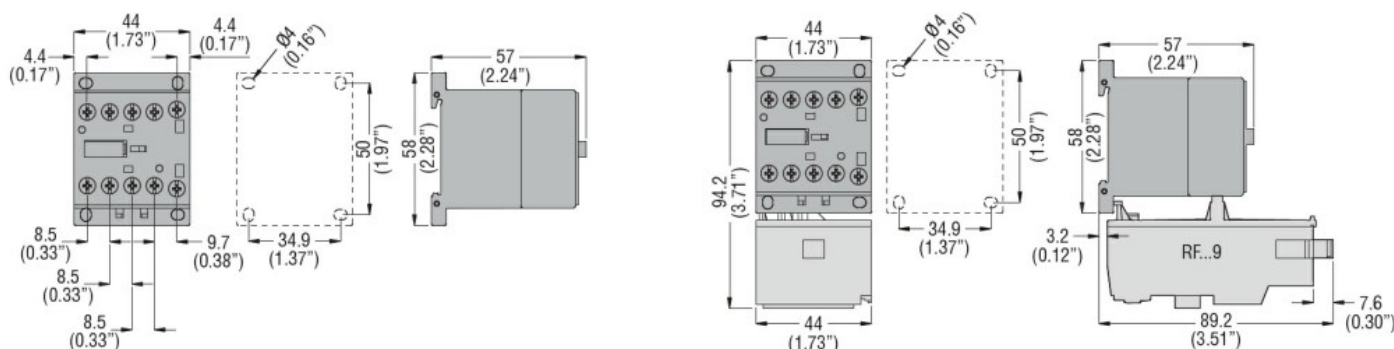

### Wiring diagrams

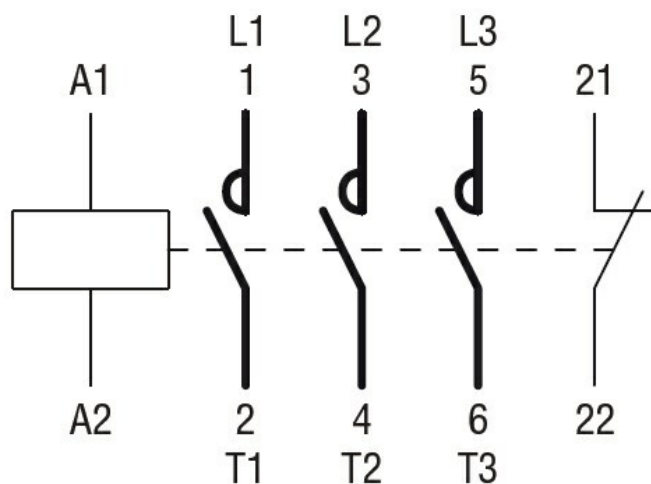

### Certifications and compliance

#### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

---

UL 60947-1

---

UL 60947-4-1

Certificates

---

CCC

---

cULus

---

EAC

ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching