



Product designation

Product type designation

Universal base to screw fix for BF09...BF38

BFX8901

<i>7</i> 1			
Mechanical features			
Weight	g	16	
AC coil operating			
Rated AC voltage at 60Hz	V	24	
AC operating voltage			

AC operating voltage

of 60Hz coil powered at 60Hz

pick-up

max %Us 110 drop-out min %Us 20

%Us

%Us

min

max

80


55

AC average coil consumption at 20°C

of 60Hz coil powered at 60Hz

	in-rush	VA	75	
	holding	VA	9	
Dissipation at holding ≤20°C 50Hz		W	2.5	
UL technical data				
Rated operational voltage AC (UL)		V	600	

Dimensions

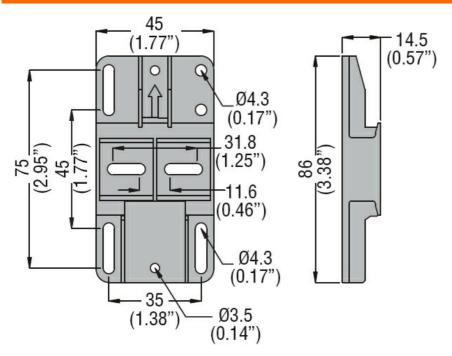

Certifications and compliance

Certificates







EAC

ETIM classification

ETIM 8.0

EC002498 -Accessories/spare parts for lowvoltage switch technology