





Product designation			Power contactor
Product type designation			B1600
Contact characteristics			
Number of poles		Nr.	3
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	8
Operational frequency		min	Hz
		max	Hz
IEC Conventional free air thermal current Ith		A	1600
Operational current Ie		AC-1 (≤40°C)	A
		AC-1 (≤55°C)	A
		AC-1 (≤70°C)	A
Rated operational power AC-1 (T≤40°C)		230V	kW
		400V	kW
		500V	kW
		690V	kW
Short-time allowable current for 10s (IEC/EN60947-1)		A	8300
Protection fuse		gG (IEC)	A
			A
Making capacity (RMS value)		A	6300
Breaking capacity at voltage		440V	A
		500V	A
		690V	A
Resistance per pole (average value)		mΩ	7
Power dissipation per pole (average value)		Ith	W
Tightening torque for terminals		min	Nm
		max	Nm
		min	lbin
		max	lbin
Max number of wires simultaneously connectable		Nr.	2
Power terminal protection according to IEC/EN 60529			IP00
Mechanical features			
Operating position		normal	Vertical plan
		allowable	±30°
Fixing			Screw
Weight		g	4950
Auxiliary contact characteristics			
Thermal current Ith		A	16

IEC/EN 60947-5-1 designation		A600 - P600		
Operating current AC15		230V	A	3
		400V	A	1.9
		500V	A	1.4
Operating current DC12		110V	A	5.7
Operating current DC13		24V	A	5.7
		48V	A	2.9
		60V	A	2.3
		125V	A	0.6
		220V	A	0.2
		600V	A	1.2
Operations				
Mechanical life			cycles	5000000
Electrical life			cycles	700000
Safety related data				
Performance level B10d according to EN/ISO 13489-1			rated load mechanical load	cycles cycles
				700000 5000000
Mirror contats according to IEC/EN 609474-4-1			Yes	
EMC compatibility			yes	
AC coil operating				
Rated AC voltage at 50/60Hz, 60Hz		min	V	110
		max	V	125
AC operating voltage				
of 50/60Hz coil powered at 50Hz				
pick-up		min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	60
of 50/60Hz coil powered at 60Hz				
pick-up		min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	60
of 60Hz coil powered at 60Hz				
pick-up		min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	60
AC average coil consumption at 20°C				
of 50/60Hz coil powered at 50Hz		in-rush	VA	800
		holding	VA	45
of 50/60Hz coil powered at 60Hz				

		in-rush holding	VA VA	800 45	
Dissipation at holding ≤20°C 50Hz			W	40	
DC coil operating					
DC rated control voltage			min max	V V	110 125
DC operating voltage					
	pick-up		min	%Us	80
Max cycles frequency					
Mechanical operation			cycles/h	1200	
Operating times					
Average time for Us control					
	in AC				
		Closing NO	min max	ms ms	300 450
		Opening NO	min max	ms ms	70 130
	in DC				
		Closing NO	min max	ms ms	300 450
		Opening NO	min max	ms ms	70 130
UL technical data					
Rated operational voltage AC (UL)			V	600	
Contact rating of auxiliary contacts according to UL				A600 - P600	
Ambient conditions					
Temperature					
	Operating temperature		min max	°C °C	-50 60
	Storage temperature		min max	°C °C	-60 80
Max altitude			m	3000	
Resistance & Protection					
Pollution degree				3	
Dimensions					

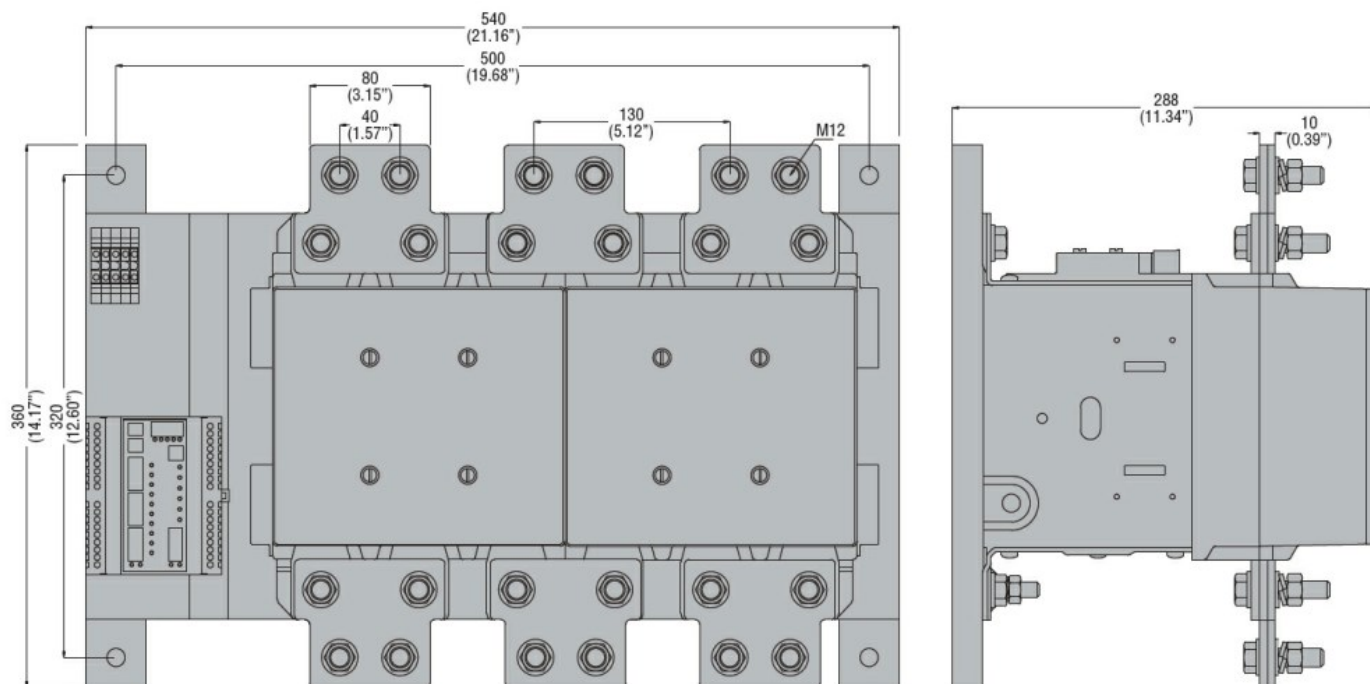

Wiring diagrams

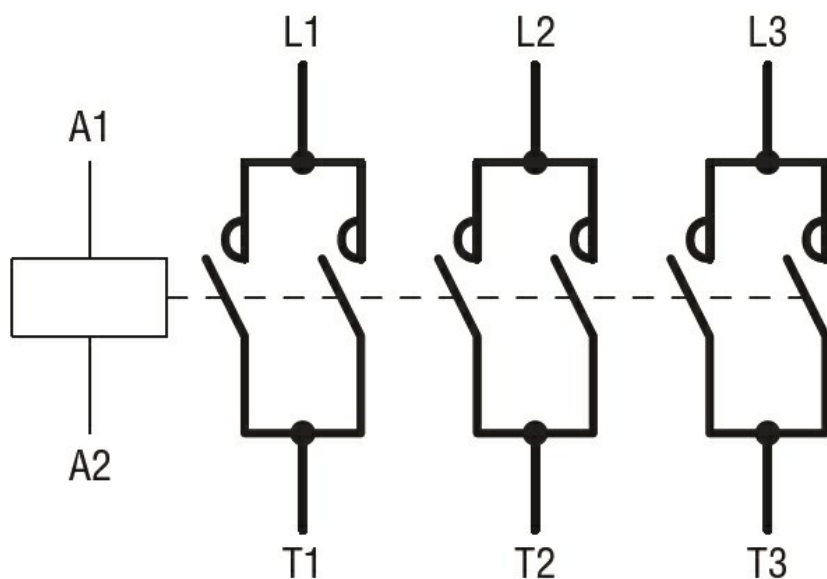

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

/

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching