



Product designation
Product type designation

Power contactor
BFD80

Contact characteristics

Number of poles	Nr.	3
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	8
Operational frequency	min Hz	25
	max Hz	400
IEC Conventional free air thermal current I_{th}	A	115
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series	400V A	100
	600V A	80
	800V A	65
	1000V A	60
Short-time allowable current for 10s (IEC/EN60947-1)	A	640
Protection fuse	gG (IEC) A	125
	aM (IEC) A	80
Resistance per pole (average value)	mΩ	0.6
Power dissipation per pole (average value)	I_{th} W	7.9
Tightening torque for terminals	min Nm	4
	max Nm	5
	min lbin	2.95
	max lbin	3.69
Tightening torque for coil terminal	min Nm	0.8
	max Nm	1
	min lbin	0.8
	max lbin	0.74
Max number of wires simultaneously connectable	Nr.	2
Conductor section	AWG/Kcmil	
	max	2
Flexible w/o lug conductor section	min mm ²	1.5
	max mm ²	35
Flexible c/w lug conductor section	min mm ²	1.5
	max mm ²	35
Power terminal protection according to IEC/EN 60529		IP20 front

Mechanical features

Operating position


	normal allowable	Vertical plan ±30°
Fixing		Screw / DIN rail 35mm
Weight	g	1240
Operations		
Mechanical life	cycles	15000000
Safety related data		
Performance level B10d according to EN/ISO 13489-1		
	mechanical load	cycles 15000000
EMC compatibility		yes
AC coil operating		
Rated AC voltage at 60Hz	V	120
AC operating voltage		
of 60Hz coil powered at 60Hz		
pick-up		
	min %Us	80
	max %Us	110
drop-out		
	min %Us	20
	max %Us	55
AC average coil consumption at 20°C		
of 60Hz coil powered at 60Hz		
	in-rush holding	VA 210
		VA 15
Dissipation at holding ≤20°C 50Hz	W	5
Max cycles frequency		
Mechanical operation	cycles/h	3600
Operating times		
Average time for Us control		
in AC		
Closing NO		
	min ms	12
	max ms	28
Opening NO		
	min ms	8
	max ms	22
in DC		
Closing NO		
	min ms	40
	max ms	85
Opening NO		
	min ms	20
	max ms	55
UL technical data		
Rated operational voltage AC (UL)	V	600
General USE		
Contactor		
	AC current	A 115
4 poles in series DC1		
	600V	A 100
Ambient conditions		
Temperature		
Operating temperature		

Storage temperature	min	°C	-50
	max	°C	70
Max altitude	min	°C	-60
	max	°C	80
		m	3000



Resistance & Protection

Pollution degree	3
------------------	---

Dimensions

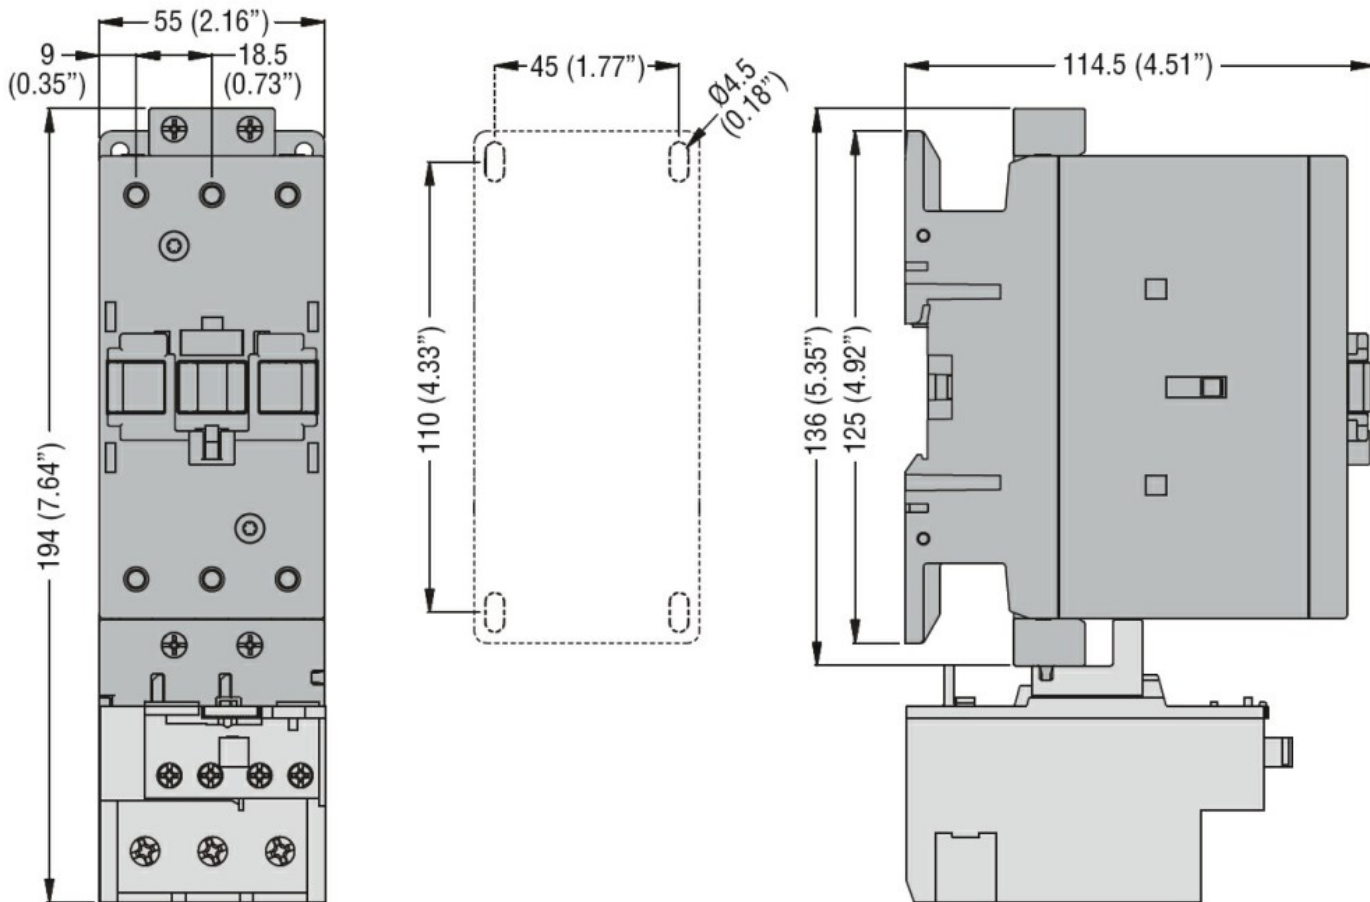

Wiring diagrams

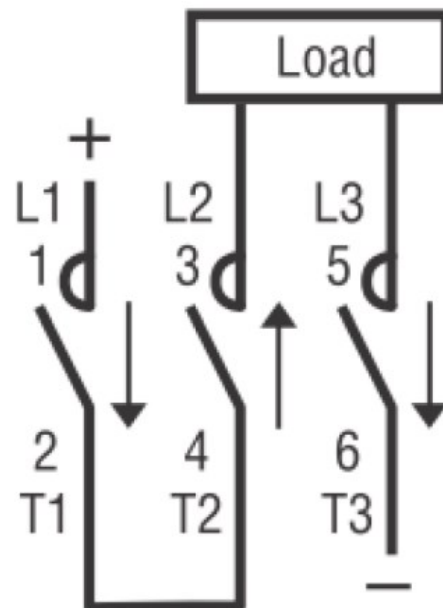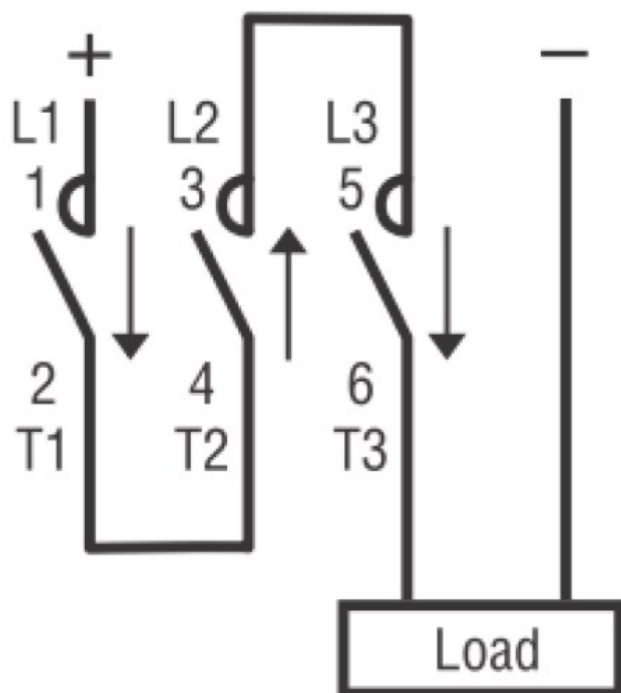

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

ETIM classification

ETIM 8.0

EC002552 -
Power contactor,
DC switching