



Product designation

Power contactor

Product type designation

B180

Contact characteristics


Number of poles	Nr.	3
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	8
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current I_{th}	A	275
Operational current I_e	AC-1 ($\leq 40^\circ\text{C}$)	A 275
	AC-1 ($\leq 55^\circ\text{C}$)	A 250
	AC-1 ($\leq 70^\circ\text{C}$)	A 200
	AC-3 ($\leq 440\text{V } \leq 55^\circ\text{C}$)	A 185
	AC-4 (400V)	A 65
Rated operational power AC-3 ($T \leq 55^\circ\text{C}$)	400V	kW 100
Rated operational power AC-1 ($T \leq 40^\circ\text{C}$)	230V	kW 95
	400V	kW 160
	500V	kW 213
	690V	kW 298
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series	75V	A 260
	110V	A 120
	220V	A –
	330V	A –
	460V	A –
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series	75V	A 260
	110V	A 170
	220V	A 150
	330V	A –
	460V	A –
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series	75V	A 260
	110V	A 170
	220V	A 170
	330V	A 150
	460V	A –
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series	75V	A 260
	110V	A 170
	220V	A 170

	330V	A	170
	460V	A	150
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 1 poles in series			
	75V	A	180
	110V	A	90
	220V	A	–
	330V	A	–
	460V	A	–
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 2 poles in series			
	75V	A	180
	110V	A	140
	220V	A	100
	330V	A	–
	460V	A	–
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 3 poles in series			
	75V	A	180
	110V	A	160
	220V	A	140
	330V	A	100
	460V	A	–
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 4 poles in series			
	75V	A	180
	110V	A	160
	220V	A	160
	330V	A	160
	460V	A	100
Short-time allowable current for 10s (IEC/EN60947-1)		A	1500
Protection fuse			
	gG (IEC)	A	315
	aM (IEC)	A	200
Making capacity (RMS value)		A	1850
Breaking capacity at voltage			
	440V	A	1850
	500V	A	1600
	690V	A	1480
Resistance per pole (average value)		mΩ	0.3
Power dissipation per pole (average value)			
	I _{th}	W	20.3
	AC-3	W	9.7
Tightening torque for terminals			
	min	Nm	18
	max	Nm	18
	min	I _{bin}	13.3
	max	I _{bin}	13.3
Tightening torque for coil terminal			
	min	Nm	1
	max	Nm	1
	min	I _{bin}	0.74
	max	I _{bin}	0.74
Max number of wires simultaneously connectable		Nr.	2
Conductor section			
	AWG/Kcmil		
	max		300 kcmil

Power terminal protection according to IEC/EN 60529			IP00	
Mechanical features				
Operating position		normal allowable	Vertical plan ±30°	
Fixing				Screw
Weight		g	6060	
Operations				
Mechanical life		cycles	10000000	
Electrical life		cycles	1000000	
Safety related data				
Performance level B10d according to EN/ISO 13489-1		rated load mechanical load	cycles	1000000
			cycles	10000000
Mirror contats according to IEC/EN 609474-4-1				Yes
EMC compatibility				yes
AC coil operating				
Rated AC voltage at 50/60Hz, 60Hz		min	V	110
		max	V	125
AC operating voltage				
of 50/60Hz coil powered at 50Hz pick-up		min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	60
of 50/60Hz coil powered at 60Hz pick-up		min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	60
of 60Hz coil powered at 60Hz pick-up		min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	60
AC average coil consumption at 20°C				
of 50/60Hz coil powered at 50Hz		in-rush	VA	300
		holding	VA	10
of 50/60Hz coil powered at 60Hz		in-rush	VA	300
		holding	VA	10
Dissipation at holding ≤20°C 50Hz		W	10	
DC coil operating				
DC rated control voltage		min	V	110


		max	V	125
DC operating voltage				
pick-up		min	%Us	80
		max	%Us	110
drop-out				
		min	%Us	20
		max	%Us	60
Average coil consumption ≤20°C				
		in-rush	W	300
		holding	W	10
Max cycles frequency				
Mechanical operation			cycles/h	2400
Operating times				
Average time for Us control				
in AC	Closing NO	min	ms	60
		max	ms	100
	Opening NO	min	ms	25
		max	ms	60
in DC				
	Closing NO	min	ms	60
		max	ms	100
	Opening NO	min	ms	25
		max	ms	60
UL technical data				
Rated operational voltage AC (UL)			V	600
Full-load current (FLA) for three-phase AC motor				
		at 480V	A	180
		at 600V	A	144
Yielded mechanical performance				
for three-phase AC motor		200/208V		
		HP		
		60		
		220/230V		
		HP		
		75		
		575/600V		
		HP		
		150		
General USE				
Contactor		AC current		
		A		
		275		
Short-circuit protection fuse, 600V				
Standard fault		Short circuit current		
		kA		
		10		
		Fuse rating		
		A		
		500		
		Fuse class		
		RK5		
Ambient conditions				
Temperature				
Operating temperature		min		
		°C		
		-50		
		max		
		°C		
		70		
Storage temperature		min		
		°C		
		-60		

	max	°C	80
Max altitude		m	3000
Resistance & Protection			
Pollution degree			3
Dimensions			

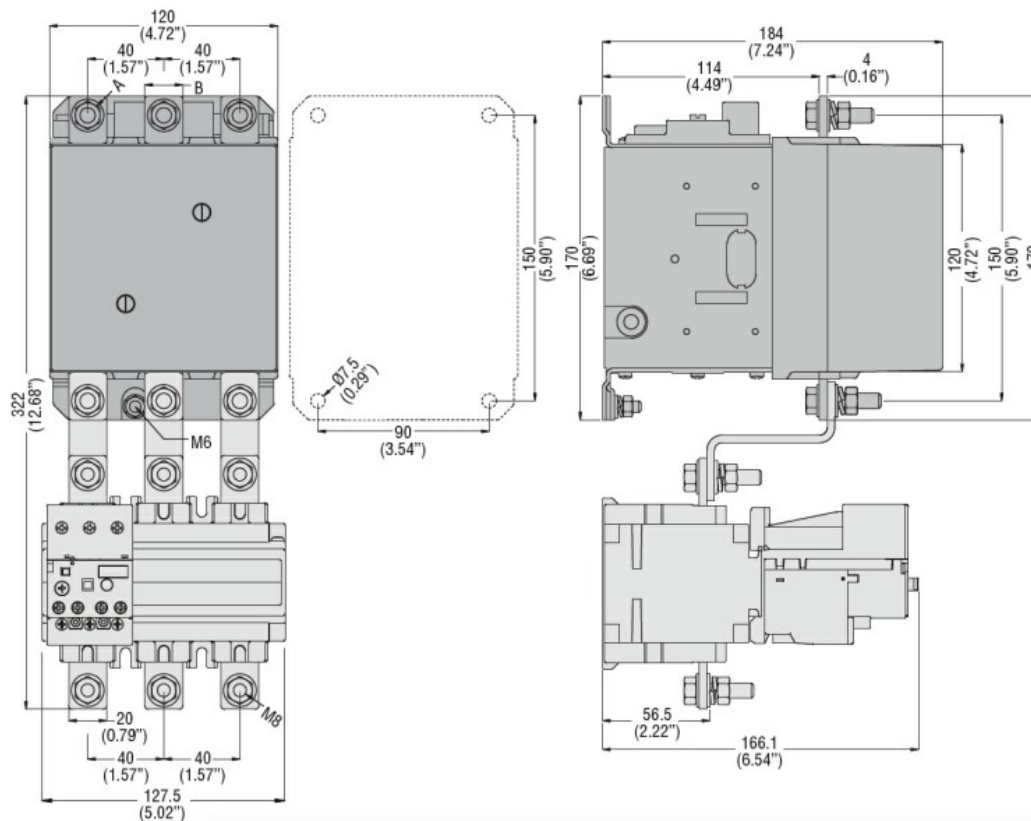

CONTACTOR TYPE	A	B
B115	M6	15 (0.59")
B145	M8	20 (0.79")
B180	M8	20 (0.79")

Wiring diagrams

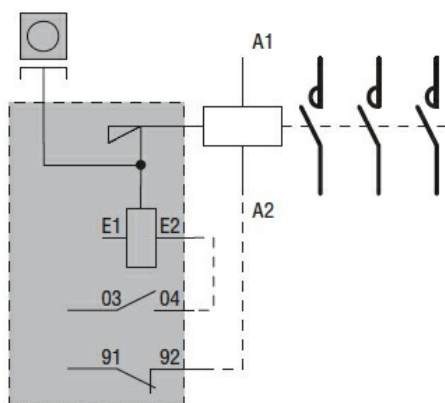

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-4-1
IEC/EN 60947-1
IEC/EN 60947-4-1
UL 60947-1
UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching