



Product designation

Reversing  
contactor

Product type designation

BFA025

### Electrical features

Maximum operating current ( $\leq 440V$ )	A	25
-------------------------------------------	---	----

### Contact characteristics

Operational current $I_e$	AC-3 ( $\leq 440V \leq 55^\circ C$ )	A	25
---------------------------	--------------------------------------	---	----

Rated operational power AC-3 ( $T \leq 55^\circ C$ )

230V	kW	7
400V	kW	12.5
415V	kW	13.4
440V	kW	13.4
500V	kW	15
690V	kW	11

Built-in auxiliary contacts

NO	0
NC	1

### UL technical data

Maximum UL/CSA horsepower ratings single-phase

110V-120V	HP	2
220V-240V	HP	3

Maximum UL/CSA horsepower ratings three-phase, 3-pole


200V-208V	HP	7.5
220V-240V	HP	7.5
440V-480V	HP	15
550V-600V	HP	15

### Mechanical features


Terminals type	Clamp screw
----------------	-------------

Weight	g	760
--------	---	-----

### Dimensions

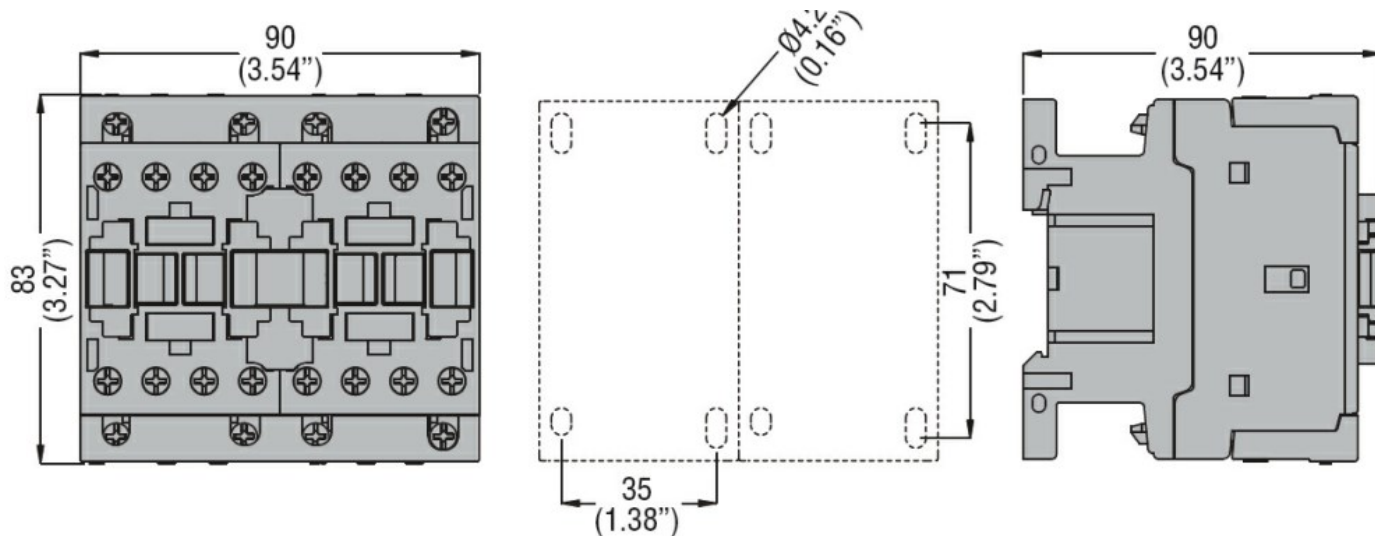

### Wiring diagrams

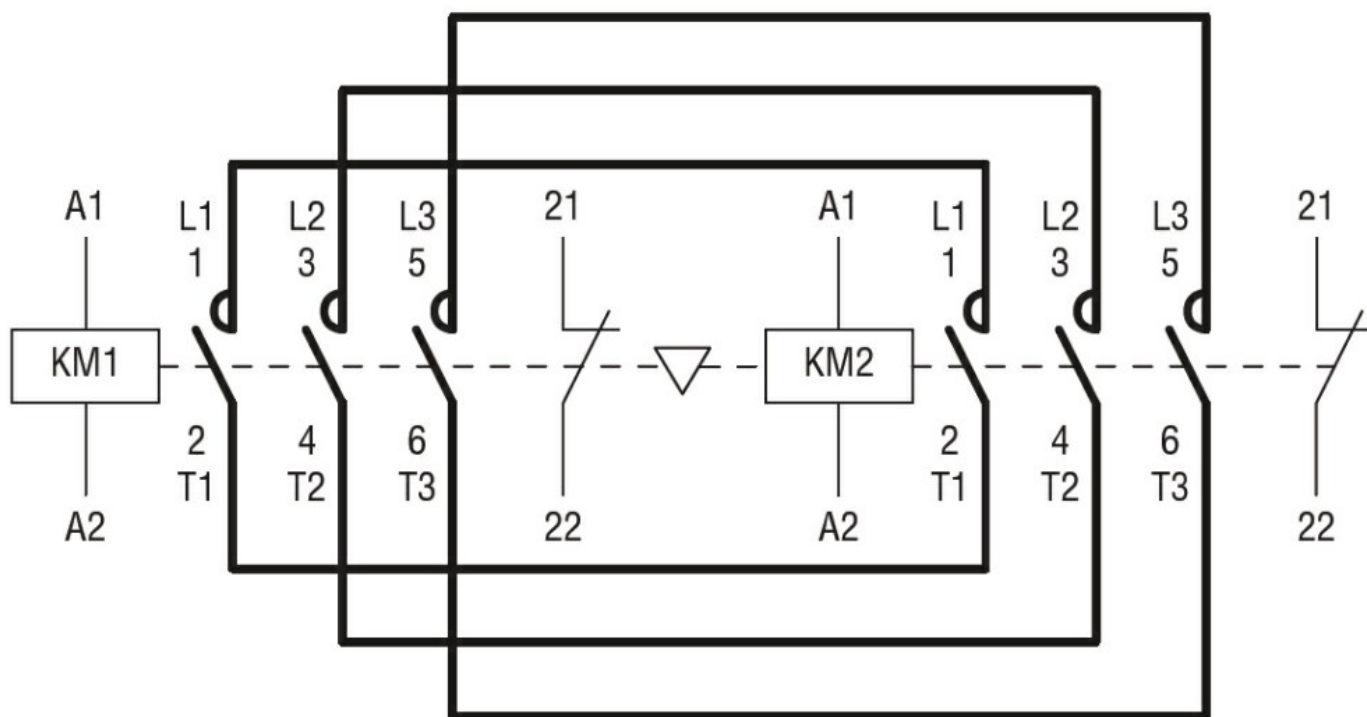

### Certifications and compliance

#### Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

#### Certificates

cULus

### ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination