



Product designation				Rotary cam switches
Product type designation				7GN20
General characteristics				
Switching diagram				92 - ON/OFF switch 4 poles
N° of elements				2
Mounting form				O98 - Rear mounting with red/yellow handle padlockable in 0, door coupling and protection covers
Contact characteristics				
Rated insulation voltage Ui				
				IEC/EN V 690
				UL/CSA V 600
Rated impulse withstand voltage Uimp				kV 6
Conventional free air thermal current Ith				
				IEC/EN A 20
				UL/CSA A 20
Rated operational voltage				V 480
Rated operational impulse voltage				kV 4
Maximum fuse size for short-circuit protection In (gG)				
				10kA A 20
				15kA A 16
				25kA A 16
Rated short time current Icw				
				1s kA 250
Conductivity				10/5 mA/V
Operational current Ie IEC/EN				
AC1/AC21A				A 20
AC15				
				110V A 10
				220/230V A 8
				380/400V A 6
				660/690V A 1.5
Rated operational power in AC				
Three-phase AC-3				
				220/230V kW 3
				380/440V kW 5.5
				500/690V kW 5.5
Single-phase AC-3				
				110V kW 0.8

		220/230V	kW	2.2
		380/440V	kW	3
Three-phase AC23A				
		220/230V	kW	5
		380/440V	kW	7.5
		500/690V	kW	7.5
Single-phase AC23A				
		110V	kW	0.8
		220/230V	kW	2.5
		380/440V	kW	3.7
Rated operational current in DC				
DC21A				
		48V	A	20
		60V	A	20
		110V	A	4
		220V	A	0.6
		440V	A	0.25
DC23A (poles in series)				
		24V	A	20 (1)
		48V	A	20 (2)
		60V	A	20 (3)
		110V	A	10 (3)
		220V	A	8 (4)
DC13				
		24V	A	20
		48V	A	16
		60V	A	12
		110V	A	1
		220V	A	0.4
		440V	A	0.15
Power dissipation			W	0.8
Mechanical features				
Terminals screw				M3
Tightening torque for terminals max			Nm	0.5
Conductor size				
AWG - Rigid cable				
		min	AWG	20
		Max	AWG	12
AWG - Flexible cable				
		min	AWG	20
		Max	AWG	14
Conductor size (IEC) - Flexible cable				
		min	mm ²	0.5
		Max	mm ²	2.5
Conductor size (IEC) - Rigid cable				
		min	mm ²	0.5
		Max	mm ²	2.5
Mechanical life			cycles	5x10 ⁶
UL technical data				
Motor power for direct-on-line control				
for three-phase motor				
		120V	HP	1.5
		240V	HP	3
		480V	HP	7.5

	600V	HP	10
for single-phase motor			
	120V	HP	0.75
	240V	HP	2

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature


min	°C	-40
max	°C	+70

Resistance & Protection

Frontal IP degree	IP40
-------------------	------


Terminals IP degree	IP00
---------------------	------

Dimensions

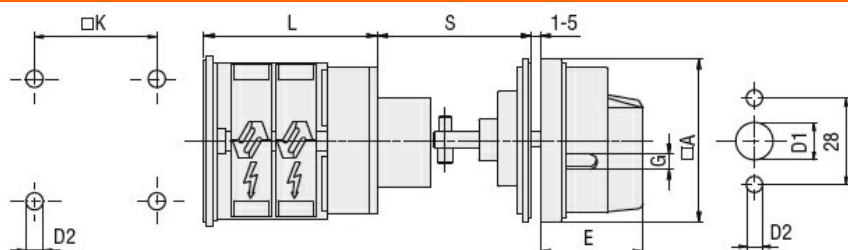

Series	Dimensions							L			
	□A	D1	D2	E	G	□K	S	1	2	3...12	
7GN12	65	12	5	34.2	5	36	45-55	41.1	50.8	60.5	147.8
7GN20	65	12	5	34.2	5	36	45-55	41.1	50.8	60.5	147.8
7GN25	65	14	5	38	6	48	45-55	51.5	66.6	81.7	217.6
7GN40	65	14	5	38	6	48	45-55	51.5	66.6	81.7	217.6
7GN63	65	14	6	38	6	68	45-55	57.3	75.4	93.5	256.4

Wiring diagrams

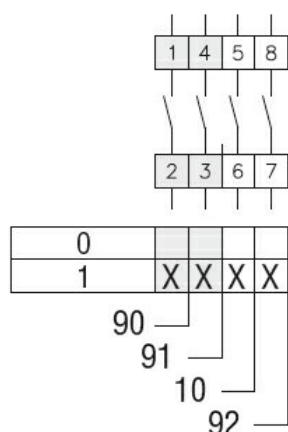

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-3
IEC/EN/BS 60947-5-1
UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete