

Product designation			Enclosed rotary cam switch		
Product type designation			7GN40		
General characteristics					
Switching diagram			25 - 1-phase motor reversing switch with spring return		
N° of elements			2		
Mounting form			P - Plastic enclosure with black handle		
Contact characteristics					
Rated insulation voltage Ui			IEC/EN	V	690
			UL/CSA	V	600
Rated impulse withstand voltage Uimp			kV		6
Conventional free air thermal current Ith			IEC/EN	A	40
			UL/CSA	A	50
Rated operational voltage			V		480
Rated operational impulse voltage			kV		4
Maximum fuse size for short-circuit protection In (gG)			10kA	A	40
			15kA	A	40
			25kA	A	40
			50kA	A	40
			63kA	A	40
Rated short time current Icw			1s	kA	1000
Conductivity			10/5 mA/V		
Operational current Ie IEC/EN					
AC1/AC21A			A		40
AC15			110V	A	25
			220/230V	A	22
			380/400V	A	12
			660/690V	A	2
Rated operational power in AC					
Three-phase AC-3			220/230V	kW	8
			380/440V	kW	15
			500/690V	kW	15
Single-phase AC-3			110V	kW	3
			220/230V	kW	6.5
			380/440V	kW	8
Three-phase AC23A			220/230V	kW	8
			380/440V	kW	18.5
			500/690V	kW	22
Single-phase AC23A					

ENCLOSED ROTARY CAM SWITCH 7GN SERIES, 1-PHASE MOTOR REVERSING SWITCH
WITH SPRING RETURN 40A IN PLASTIC ENCLOSURE 110X110MM WITH BLACK HANDLE


	110V	kW	3
	220/230V	kW	6
	380/440V	kW	11
Rated operational current in DC			
DC21A			
	48V	A	40
	60V	A	40
	110V	A	6
	220V	A	0.9
DC23A (poles in series)			
	24V	A	40 (1)
	48V	A	40 (2)
	60V	A	40 (3)
	110V	A	20 (3)
	220V	A	12 (4)
DC13			
	24V	A	40
	48V	A	32
	60V	A	16
	110V	A	3
Power dissipation		W	2.0
Mechanical features			
Terminals screw			M4
Tightening torque for terminals max		Nm	1.2
Conductor size			
AWG - Rigid cable			
	min	AWG	16
	Max	AWG	8
AWG - Flexible cable			
	min	AWG	16
	Max	AWG	10
Conductor size (IEC) - Flexible cable			
	min	mm ²	1.5
	Max	mm ²	6
Conductor size (IEC) - Rigid cable			
	min	mm ²	1.5
	Max	mm ²	10
Mechanical life		cycles	5x10 ⁶
UL technical data			
Motor power for direct-on-line control			
for three-phase motor			
	120V	HP	5
	240V	HP	10
	480V	HP	20
	600V	HP	20
for single-phase motor			
	120V	HP	2
	240V	HP	5
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+55
Storage temperature			

min °C -40
max °C +70

Resistance & Protection


Frontal IP degree	IP65
Terminals IP degree	IP00

Dimensions

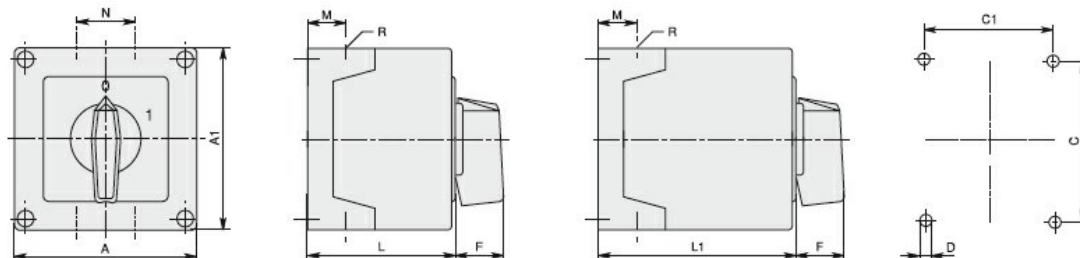

Series	Enclosure size	Number of elements		Dimensions										Cable entry	Protection degree
		L	L1	A	A1	C	C1	D	F	M	N	L	L1		
7GN12	75x75	1 - 2	3 - 4	75	75	50	64	4.5	19	14	28	57.5	79.8	4xPG13.5	IP65
7GN20		1 - 2	3 - 4												
7GN25		1	2 - 3												
7GN12	90x90	1 - 3	4 - 6	90	90	79	63	4.5	25	19	30	71.3	98.3	4xPG16	IP65
7GN20		1 - 3	4 - 6												
7GN25		1 - 2	3 - 4												
7GN32		1 - 2	3 - 4												
7GN40	110x110	1	2 - 3	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65
7GN12		1 - 4	5 - 8												
7GN20		1 - 4	5 - 8												
7GN25		1 - 3	4 - 5												
7GN32		1 - 3	4 - 5												
7GN40	125x175	1 - 2	3 - 5	125	175	146	112	5.5	32	21	68	84.3	118.3	4xPG21 2xPG11	IP65
7GN63		1 - 2	3 - 4												
7GN32		1 - 3	4 - 5												
7GN40		1 - 2	3 - 4												
7GN125	180x254	1	2	180	254	120	190	5.5	32	35	76	121	175	4xPG29 2xPG11	IP65
7GN32		1 - 5	6 - 8												
7GN40		1 - 4	5 - 7												
7GN63		1 - 3	4 - 6												
7GN125	180x254	1 - 2	3 - 4	180	254	120	190	5.5	32	35	76	121	175	4xPG29 2xPG11	IP65
7GN32		1 - 5	6 - 8												
7GN40		1 - 4	5 - 7												
7GN63		1 - 3	4 - 6												

Wiring diagrams

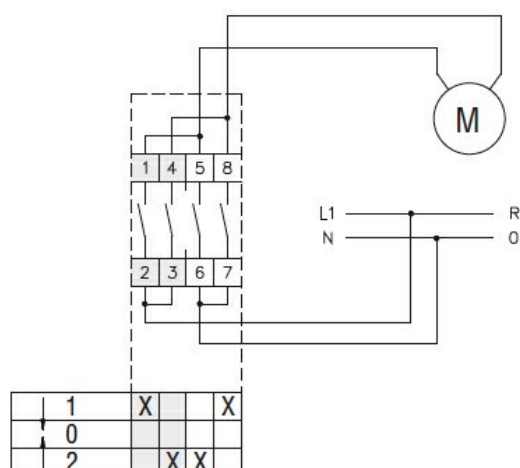

Certifications and compliance

Compliance

IEC/EN/BS 60947-1
IEC/EN/BS 60947-3
IEC/EN/BS 60947-5-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete