

Product designation			Enclosed rotary cam switch		
Product type designation			7GN125		
General characteristics					
Switching diagram			53 - Changeover switch 3 poles - 2 speed motor starting with separate windings		
N° of elements			3		
Mounting form			P - Plastic enclosure with black handle		
Contact characteristics					
Rated insulation voltage Ui			IEC/EN	V	690
			UL/CSA	V	600
Rated impulse withstand voltage Uimp				kV	6
Conventional free air thermal current Ith			IEC/EN	A	125
			UL/CSA	A	130
Rated operational voltage				V	690
Rated operational impulse voltage				kV	6
Maximum fuse size for short-circuit protection In (gG)			10kA	A	125
			15kA	A	100
			25kA	A	100
			50kA	A	100
			63kA	A	100
Rated short time current Icw			1s	kA	2100
Conductivity			10/5 mA/V		
Operational current Ie IEC/EN					
AC1/AC21A				A	125
AC15			110V	A	40
			220/230V	A	28
			380/400V	A	15
			660/690V	A	5
Rated operational power in AC					
Three-phase AC-3			220/230V	kW	18.5
			380/440V	kW	37
			500/690V	kW	33
Single-phase AC-3			110V	kW	5
			220/230V	kW	11
			380/440V	kW	15
Three-phase AC23A			220/230V	kW	30
			380/440V	kW	45
			500/690V	kW	37

Single-phase AC23A

110V	kW	5
220/230V	kW	11
380/440V	kW	15

Rated operational current in DC

DC21A

48V	A	125
60V	A	80
110V	A	10
220V	A	1.2

DC23A (poles in series)

24V	A	125 (1)
48V	A	125 (2)
60V	A	125 (3)
110V	A	50 (3)
220V	A	20 (4)

DC13

24V	A	125
48V	A	100
60V	A	50
110V	A	4

Power dissipation

W	6.3
---	-----

Mechanical features

Terminals screw

M2X5

Tightening torque for terminals max

Nm	2
----	---

Conductor size

AWG - Rigid cable

min	AWG	14
Max	AWG	1/0

AWG - Flexible cable

min	AWG	14
Max	AWG	1/0

Conductor size (IEC) - Flexible cable

min	mm ²	2.5
Max	mm ²	50

Conductor size (IEC) - Rigid cable

min	mm ²	2.5
Max	mm ²	50

Mechanical life

cycles	1X10 ⁶
--------	-------------------

UL technical data

Motor power for direct-on-line control

for three-phase motor

120V	HP	15
240V	HP	25
480V	HP	50
600V	HP	40

for single-phase motor

120V	HP	5
240V	HP	15

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature


min °C -40
max °C +70

Resistance & Protection

Frontal IP degree IP65


Terminals IP degree IP00

Dimensions

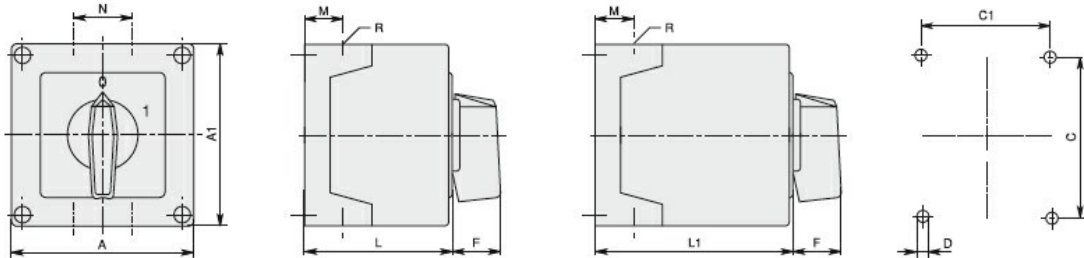

Series	Enclosure size	Number of elements		Dimensions										Cable entry	Protection degree
		L	L1	A	A1	C	C1	D	F	M	N	L	L1		
7GN12	75x75	1 - 2	3 - 4	75	75	50	64	4.5	19	14	28	57.5	79.8	4xPG13.5	IP65
7GN20		1 - 2	3 - 4												
7GN25		1	2 - 3												
7GN12	90x90	1 - 3	4 - 6	90	90	79	63	4.5	25	19	30	71.3	98.3	4xPG16	IP65
7GN20		1 - 3	4 - 6												
7GN25		1 - 2	3 - 4												
7GN32		1 - 2	3 - 4												
7GN40	110x110	1	2 - 3	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65
7GN12		1 - 4	5 - 8												
7GN20		1 - 4	5 - 8												
7GN25		1 - 3	4 - 5												
7GN32		1 - 3	4 - 5												
7GN40	125x175	1 - 2	3 - 5	125	175	146	112	5.5	32	21	68	84.3	118.3	4xPG21 2xPG11	IP65
7GN63		1 - 2	3 - 4												
7GN125		1	2												
7GN32	180x254	1 - 3	4 - 5	180	254	120	190	5.5	32	35	76	121	175	4xPG29 2xPG11	IP65
7GN40		1 - 4	5 - 7												
7GN63		1 - 3	4 - 6												
7GN125		1 - 2	3 - 4												

Wiring diagrams

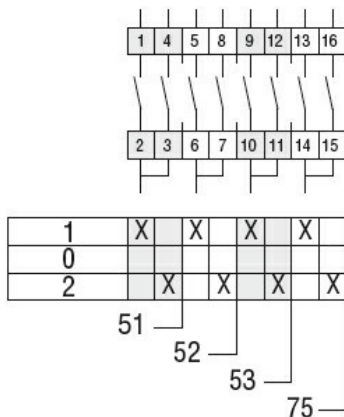

Certifications and compliance

Compliance

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete