

Product designation			Rotary cam switches		
Product type designation			GN200		
General characteristics					
Switching diagram			25 - 1-phase motor reversing switch with spring return		
N° of elements			2		
Mounting form			U - Front mounting with black handle		
Contact characteristics					
Rated insulation voltage Ui			IEC/EN UL/CSA	V V	690 600
Rated impulse withstand voltage Uimp			kV		8
Conventional free air thermal current Ith			IEC/EN UL/CSA	A A	200 200
Rated operational voltage			V		690
Rated operational impulse voltage			kV		6
Maximum fuse size for short-circuit protection In (gG)			10kA 15kA	A A	200 200
Rated short time current Icw			1s	kA	3300
Operational current Ie IEC/EN AC1/AC21A			A		200
Rated operational power in AC Three-phase AC-3			220/230V 380/440V	kW kW	27.5 47
Rated operational current in DC DC21A			48V 60V 110V 220V 440V	A A A A A	200 200 35 2.5 0.9
Power dissipation			W		26
Mechanical features					
Terminals screw					M10
Tightening torque for terminals max			Nm		10
Conductor size					
AWG - Rigid cable			Max	AWG	1X3
AWG - Flexible cable			Max	AWG	0
Conductor size (IEC) - Flexible cable			Max	mm²	1X95
Conductor size (IEC) - Rigid cable					

	Max	mm ²	1X95
Mechanical life		cycles	2X10 ⁵

UL technical data

Motor power for direct-on-line control

for three-phase motor

120V	HP	30
240V	HP	50
480V	HP	100
600V	HP	75

for single-phase motor

120V	HP	15
240V	HP	30

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Resistance & Protection


Frontal IP degree

IP40

Terminals IP degree

IP00


Dimensions

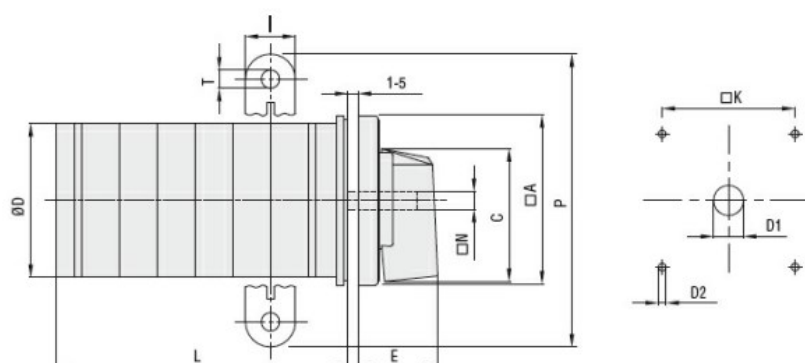

Series	Dimensions											L Number of elements ①											
	□A	C	ØD	ØD1	ØD2	E	I	□K	□N	P	ØT	1	2	3	4	5	6	7	8	9	10	11	12
GN200	132	104	120	16	5.3	56	20	104	10	140	10.5	77	107	136	166	196	226	284	314	343	373	402	432
GN315	132	104	120	16	5.3	56	20	104	10	145	10.5	77	107	136	166	196	226	284	314	343	373	402	432

① For devices with 6 or more elements please consult Technical support, see contact details on inside front cover.

Wiring diagrams

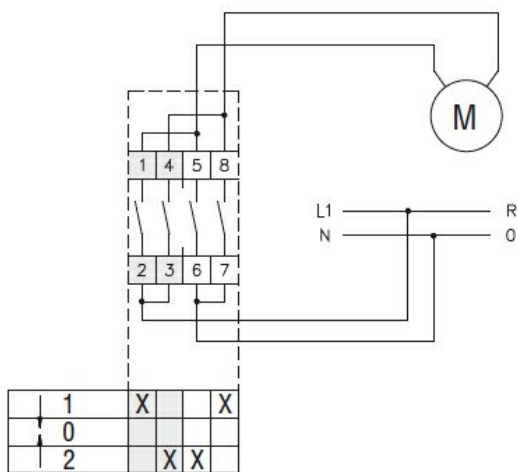

Certifications and compliance

Compliance

IEC/EN/BS 60947-1
IEC/EN/BS 60947-3
IEC/EN/BS 60947-5-1
UL60947-4-1

Certificates

UR

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete