



Product designation

Product type designation

General characteristics

Switching diagram

N° of elements

Mounting form

Rotary cam
switches
7GN125

03 - ON/OFF
spring return
switch 3 poles

U - Front
mounting with
black handle

Contact characteristics

Rated insulation voltage U_i

IEC/EN	V	690
UL/CSA	V	600

Rated impulse withstand voltage U_{imp}

kV 6

Conventional free air thermal current I_{th}

IEC/EN	A	125
UL/CSA	A	130

Rated operational voltage

V 690

Rated operational impulse voltage

kV 6

Maximum fuse size for short-circuit protection I_n (gG)

10kA	A	125
15kA	A	100
25kA	A	100
50kA	A	100
63kA	A	100

Rated short time current I_{cw}

1s kA 2100

Conductivity

10/5 mA/V

Operational current I_e IEC/EN

AC1/AC21A

A 125

AC15

110V	A	40
220/230V	A	28
380/400V	A	15
660/690V	A	5

Rated operational power in AC

Three-phase AC-3

220/230V	kW	18.5
380/440V	kW	37
500/690V	kW	33

Single-phase AC-3

110V	kW	5
220/230V	kW	11

ROTARY CAM SWITCH 7GN SERIES, ON-OFF SPRING RETURN SWITCH 3 POLES 125A,
FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 90X90MM

		380/440V	kW	15
Three-phase AC23A		220/230V	kW	30
		380/440V	kW	45
		500/690V	kW	37
Single-phase AC23A		110V	kW	5
		220/230V	kW	11
		380/440V	kW	15
Rated operational current in DC				
DC21A		48V	A	125
		60V	A	80
		110V	A	10
		220V	A	1.2
DC23A (poles in series)		24V	A	125 (1)
		48V	A	125 (2)
		60V	A	125 (3)
		110V	A	50 (3)
		220V	A	20 (4)
DC13		24V	A	125
		48V	A	100
		60V	A	50
		110V	A	4
Power dissipation			W	6.3
Mechanical features				
Terminals screw				M2X5
Tightening torque for terminals max			Nm	2
Conductor size				
AWG - Rigid cable		min	AWG	14
		Max	AWG	1/0
AWG - Flexible cable		min	AWG	14
		Max	AWG	1/0
Conductor size (IEC) - Flexible cable		min	mm ²	2.5
		Max	mm ²	50
Conductor size (IEC) - Rigid cable		min	mm ²	2.5
		Max	mm ²	50
Mechanical life			cycles	1X10 ⁶
UL technical data				
Motor power for direct-on-line control				
for three-phase motor		120V	HP	15
		240V	HP	25
		480V	HP	50
		600V	HP	40
for single-phase motor		120V	HP	5
		240V	HP	15

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Resistance & Protection

Frontal IP degree


IP40

Terminals IP degree

IP00

Dimensions

Wiring diagrams

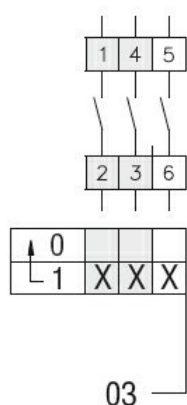

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-3
IEC/EN/BS 60947-5-1
UL60947-4-1

Certificates

EAC
UL

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete