

Product designation			Rotary cam switches		
Product type designation			GN200		
General characteristics					
Switching diagram			109 - Multi-step 0-1-2-3-4 1 pole		
N° of elements			2		
Mounting form			U - Front mounting with black handle		
Contact characteristics					
Rated insulation voltage Ui			IEC/EN UL/CSA	V V	690 600
Rated impulse withstand voltage Uimp			kV		8
Conventional free air thermal current Ith			IEC/EN UL/CSA	A A	200 200
Rated operational voltage			V		690
Rated operational impulse voltage			kV		6
Maximum fuse size for short-circuit protection In (gG)			10kA 15kA	A A	200 200
Rated short time current Icw			1s	kA	3300
Operational current Ie IEC/EN AC1/AC21A			A		200
Rated operational power in AC Three-phase AC-3			220/230V 380/440V	kW kW	27.5 47
Rated operational current in DC DC21A			48V 60V 110V 220V 440V	A A A A A	200 200 35 2.5 0.9
Power dissipation			W		26
Mechanical features					
Terminals screw					M10
Tightening torque for terminals max			Nm		10
Conductor size			AWG - Rigid cable		
			Max	AWG	1X3
			AWG - Flexible cable		
			Max	AWG	0
			Conductor size (IEC) - Flexible cable		
			Max	mm²	1X95
			Conductor size (IEC) - Rigid cable		
			Max	mm²	1X95
Mechanical life			cycles		2X10⁵

UL technical data

Motor power for direct-on-line control
for three-phase motor

120V	HP	30
240V	HP	50
480V	HP	100
600V	HP	75

for single-phase motor

120V	HP	15
240V	HP	30

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature


min	°C	-40
max	°C	+70

Resistance & Protection

Frontal IP degree IP40

Terminals IP degree IP00


Dimensions

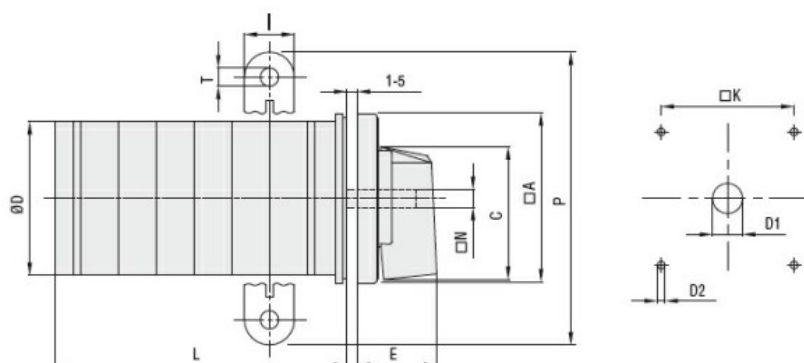

Series	Dimensions											L Number of elements ①											
	□A	C	ØD	ØD1	ØD2	E	I	□K	□N	P	ØT	1	2	3	4	5	6	7	8	9	10	11	12
GN200	132	104	120	16	5.3	56	20	104	10	140	10.5	77	107	136	166	196	226	284	314	343	373	402	432
GN315	132	104	120	16	5.3	56	20	104	10	145	10.5	77	107	136	166	196	226	284	314	343	373	402	432

① For devices with 6 or more elements please consult Technical support, see contact details on inside front cover.

Wiring diagrams



0				
1	X			
2			X	
3		X		
4				X

109

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

UL60947-4-1

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete