



Product designation				Rotary cam switches
Product type designation				7GN20
General characteristics				
Switching diagram				90 - ON/OFF switch 1 pole
N° of elements				1
Mounting form				O88 - Rear mounting with red/yellow handle padlockable in 0, door coupling and protection covers
Contact characteristics				
Rated insulation voltage Ui				
				IEC/EN V 690
				UL/CSA V 600
Rated impulse withstand voltage Uimp				kV 6
Conventional free air thermal current Ith				
				IEC/EN A 20
				UL/CSA A 20
Rated operational voltage				V 480
Rated operational impulse voltage				kV 4
Maximum fuse size for short-circuit protection In (gG)				
				10kA A 20
				15kA A 16
				25kA A 16
Rated short time current Icw				
				1s kA 250
Conductivity				10/5 mA/V
Operational current Ie IEC/EN				
AC1/AC21A				A 20
AC15				
				110V A 10
				220/230V A 8
				380/400V A 6
				660/690V A 1.5
Rated operational power in AC				
Three-phase AC-3				
				220/230V kW 3
				380/440V kW 5.5
				500/690V kW 5.5
Single-phase AC-3				
				110V kW 0.8

ROTARY CAM SWITCH 7GN SERIES, ON-OFF SWITCH 1 POLE 20A, FOR REAR MOUNTING
WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION
COVERS, FRONT PLATE 65X65MM

	220/230V	kW	2.2
	380/440V	kW	3
Three-phase AC23A			
	220/230V	kW	5
	380/440V	kW	7.5
	500/690V	kW	7.5
Single-phase AC23A			
	110V	kW	0.8
	220/230V	kW	2.5
	380/440V	kW	3.7
Rated operational current in DC			
DC21A			
	48V	A	20
	60V	A	20
	110V	A	4
	220V	A	0.6
	440V	A	0.25
DC23A (poles in series)			
	24V	A	20 (1)
	48V	A	20 (2)
	60V	A	20 (3)
	110V	A	10 (3)
	220V	A	8 (4)
DC13			
	24V	A	20
	48V	A	16
	60V	A	12
	110V	A	1
	220V	A	0.4
	440V	A	0.15
Power dissipation		W	0.8
Mechanical features			
Terminals screw			M3
Tightening torque for terminals max		Nm	0.5
Conductor size			
AWG - Rigid cable			
	min	AWG	20
	Max	AWG	12
AWG - Flexible cable			
	min	AWG	20
	Max	AWG	14
Conductor size (IEC) - Flexible cable			
	min	mm ²	0.5
	Max	mm ²	2.5
Conductor size (IEC) - Rigid cable			
	min	mm ²	0.5
	Max	mm ²	2.5
Mechanical life		cycles	5x10 ⁶
UL technical data			
Motor power for direct-on-line control			
for three-phase motor			
	120V	HP	1.5
	240V	HP	3
	480V	HP	7.5

	600V	HP	10
for single-phase motor			
	120V	HP	0.75
	240V	HP	2

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature


min	°C	-40
max	°C	+70

Resistance & Protection

Frontal IP degree	IP40
-------------------	------


Terminals IP degree	IP00
---------------------	------

Dimensions

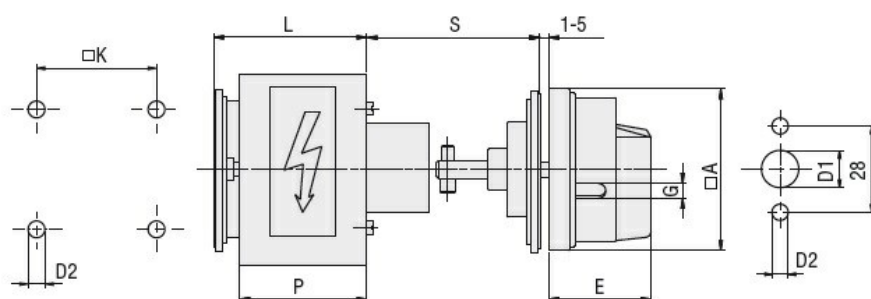

Series	Dimensions								
	□A	D1	D2	E	G	□K	S	P	L
7GN12	65	12	5	34.2	5	36	45-55	43	51.3
7GN20	65	12	5	34.2	5	36	45-55	43	51.3
7GN25	65	12	5	34.2	5	36	45-55	51	59.6
7GN32	65	14	5	38	6	48	45-55	55	68.7
7GN40	65	14	5	38	6	48	45-55	55	68.7

Wiring diagrams

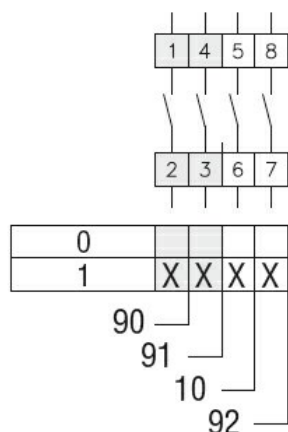

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1

ROTARY CAM SWITCH 7GN SERIES, ON-OFF SWITCH 1 POLE 20A, FOR REAR MOUNTING
WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION
COVERS, FRONT PLATE 65X65MM

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete